

Schäfer + Peters GmbH
Competence in Stainless Steel



TBS-DRILL, CYL. HEAD TERRACE SCREWS, CUTTING-POINT
ARTICLE 9245 1.4006 TX



ARTICLE 9245 1.4006 TX TBS-DRILL, CYL. HEAD TERRACE SCREWS, CUTTING-POINT

USES:

Ideal for all companies involved in wood processing (carpenters, timber construction) and all horticulturists and landscapers for fastening timbers and landing stages. Also the ideal solution for hardwoods such as Bankirai, Massaranduba, and many more.

A minimum screw-in depth of 4 x the diameter must be ensured. A screw-in depth of 8 x the diameter should be achieved depending on the wood.

FEATURES:

- Cylinder head
- Stripping ribs
- Cut tip
- TX driving feature
- Martensitic stainless steel hardened (1.4006)
- Special smooth coating

BENEFITS

Stripping ribs

The stripping ribs ensure low screw-in torques even with high attachment parts.

No predrilling

Predrilling is not needed in most cases. We do however always recommend testing the application. Timber is not torn out. The Cut tip ensures accurate attachment on hardwood without tearing out.


Wobble-free driving feature

The TX inner multi-tooth drive allows the screw to be easily and securely screwed in when the screw is attached and countersunk.


Cylinder head no distant wooden fibers.

The wooden fibers are drawn into the material by the cylinder head with the implied countersunk head. An optimal barefooted flooring originates by this special process.

d d	l l	b b	dk dk	k k	Antrieb Drive size	Artikelnummer Item Number	
4	40	24	5,7	4,35	TX15	9245400640 40/24	200
	45	24	5,7	4,35	TX15	9245400640 45/24	200
	50	30	5,7	4,35	TX15	9245400640 50/30	200
	60	35	5,7	4,35	TX15	9245400640 60/35	200
	70	40	5,7	4,35	TX15	9245400640 70/40	200
4,5	45	24	7,05	4,8	TX20	9245400645 45/24	200
	50	30	7,05	4,8	TX20	9245400645 50/30	200
	60	35	7,05	4,8	TX20	9245400645 60/35	200
	70	40	7,05	4,8	TX20	9245400645 70/40	200
5	80	50	7,05	4,8	TX20	9245400645 80/50	200
	45	24	8,75	5,45	TX25	9245400650 45/24	100
	50	30	8,75	5,45	TX25	9245400650 50/30	100
	60	35	8,75	5,45	TX25	9245400650 60/35	100
	70	40	8,75	5,45	TX25	9245400650 70/40	100
	80	50	8,75	5,45	TX25	9245400650 80/50	100
	90	54	8,75	5,45	TX25	9245400650 90/54	100
	100	60	8,75	5,45	TX25	9245400650 100/60	100

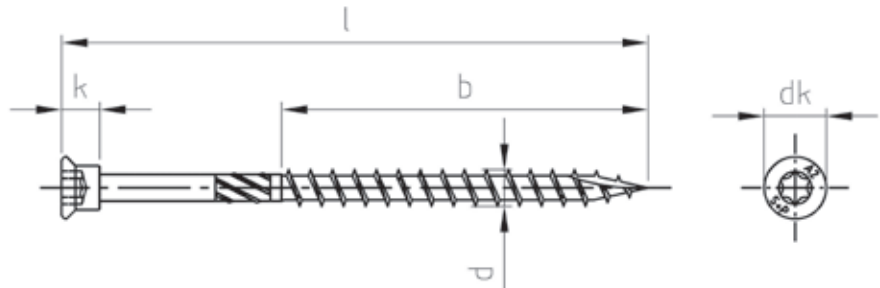

BNEFITS:

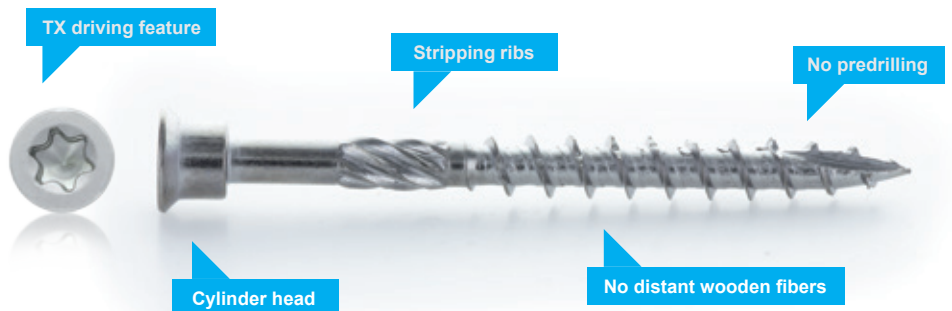

Schäfer + Peters GmbH
Zeilbaumweg 32
DE-74613 Öhringen

Tel. +49 (0) 7941 6094-0
Fax +49 (0) 7941 6094-700

info@schaefer-peters.com
www.schaefer-peters.com