

# Schäfer + Peters GmbH

Competence in Stainless Steel





SP-DRILL, CSK HEAD TIMBER SCREWS WITH DRILL BIT AND STRIPPING RIBS ITEM 9246 1.4006 TX



# ITEM 9246 1.4006 TX SP-DRILL, CSK HEAD TIMBER SCREWS WITH DRILL BIT AND STRIPPING RIBS

#### **APPLICATIONS:**

Ideal for all companies involved in wood processing (carpenters, timber construction) and all horticulturists and landscapers for fastening timbers and landing stages. Also the ideal solution for hardwoods such as Bangkirai, Massaranduba, and many more.

A minimum screw-in depth of 4 x the diameter must be ensured. A screw-in depth of 8 x the diameter should be achieved depending on the wood.

#### **FEATURES:**

- 90° countersunk head
- Drill bit
- Milled ribs under the head
- Stripping ribs
- TX driving feature Martensitic hardened stainless steel (1.4006)
- Special smooth coating

#### **PRODUCT BENEFITS:**

Stripping ribs

The stripping ribs ensure low screw-in torques even with high attachment parts.

#### No predrilling

Predrilling is not needed in most cases. We do, however, recommend always testing the application.

## Wobble-free drive

The TX driving feature allows the screw to be driven easily and securely from setting to countersinking.





# Schäfer + Peters GmbH


Zeilbaumweg 32 DE-74613 Öhringen

Tel. +49 (0) 7941 6094-0 Fax +49 (0) 7941 6094-700

info@schaefer-peters.com www.schaefer-peters.com

d	4	4.5	5	6
l/mm	Item. no.	Item. no.	Item. no.	Item. no.
30	9246400640 30/18			
35	9246400640 35/24			
40	9246400640 40/24	9246400645 40/24	9246400650 40/24	
45	9246400640 45/30	9246400645 45/30	9246400650 45/30	
50	9246400640 50/30	9246400645 50/30	9246400650 50/30	
60	9246400640 60/40	9246400645 60/40	9246400650 60/40	
70	9246400640 70/50	9246400645 70/50	9246400650 70/50	
80		9246400645 80/60	9246400650 80/60	9246400660 80/60
90			9246400650 90/60	9246400660 90/60
100			9246400650 100/60	9246400660 100/60
120				9246400660 120/70
140				9246400660 140/70
160				9246400660 160/70

<b>3</b>	200	200	200	200 >= 100 100
dk	8	9	10	12
k	2.5	2.7	3	3.6
dp	3	3.3	3.6	4.4
lp	3.7	4.7	5.7	6.7
Drive	TX15	TX20	TX25	TX25

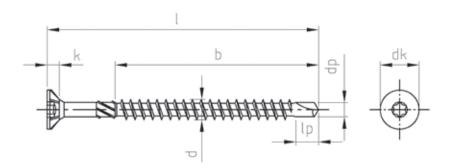

## **PRODUCT BENEFITS:**

